



AS/NZS 1576 Working load rate



Compact and portable Lightweight Working height: 3.9M

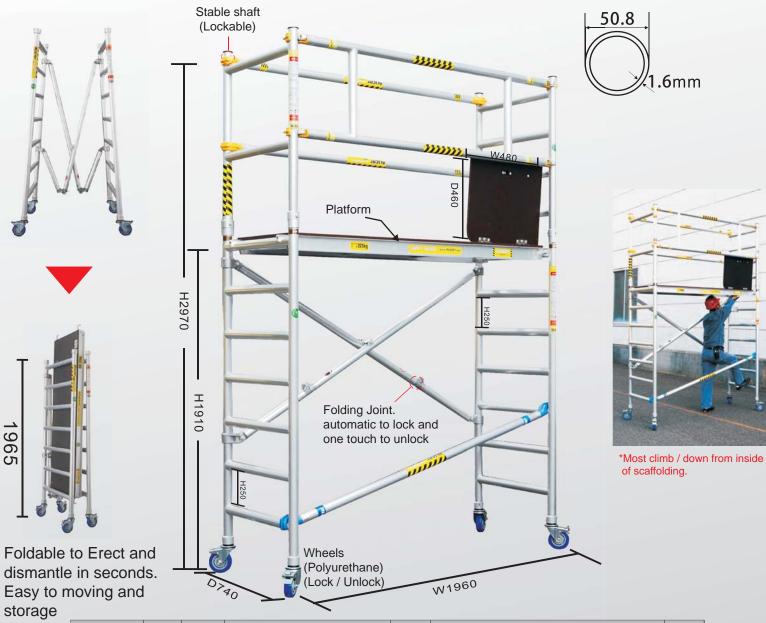


Model No	Qty	Height (mm)	Working Space Size (mm)			Weight		Dooking						
Model No.			W	D	Н	(kg)	Body	Wheel	Stable Shaft (Oblique)	Platform	Handle Frame	Stable Shaft	Stable Shaft (center)	Packing
JAS-ZS190	1 set	2970	1960	740	1910	62.2	1	4	1	1	2	1	2	2
JAS-FSHA	Support	1965	1960	740	410~1910 7th Steps	43.2	1	4	-	1	-	-	ı	1
JAS-FSXD	Handle	1060	1960	740	_	19.0	_		1	_	2	1	2	1


<JAS> Extra Option




JAS-Second Floor Fabricate

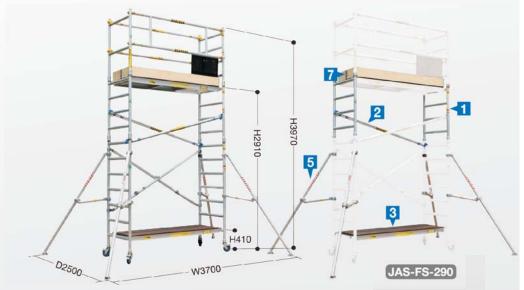

Please let the scaffold vertical stand up and open it to opposite direction. Make sure the folding joints are all in straight direction. Please make sure four of wheels are all locked.



2 Scaffolding working height under 1.4M<count 5th steps from down to up> is not able to set up Stable Shaft (Oblique).



If Scaffolding working height more than 1.4M, must to set up Handle Frame.



Working on Scaffolding in height 2.9M, JAS-FS290 must to set up on JAS-ZS190.
Please also set up 4 pices of outside support shaft. (2M)




Working on Scaffolding in height 3.9M, JAS-FS390 must to set up on JAS-ZS190.
Please also set up 4 pices of outside support shaft. (3M)



 ▲ Please must climb / down the ladder from inside of scaffold.
 ▲ Please must lock and make sure the 4 of wheels are locked.

⚠ Working load rated to 225kg

JAS-Third Floor Fabricate

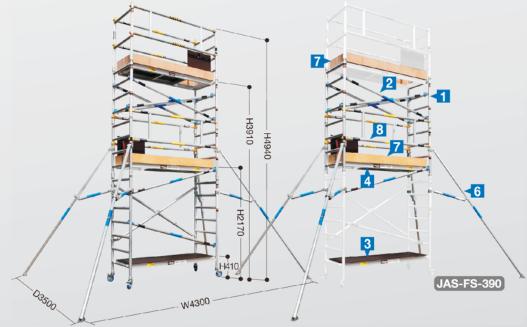

Adjustable Wheel JAS-C200 4 pieces/set Adjust height: 0 ~ 33 cm Material: Polyurethane Weight: 5.7 kg

Jack

JAS-ZJAC 4 pieces/set

Adjust height: 0 ~ 33 cm

Weight: 4.0 kg

		Accessories									
Details of JAS Addid Pats	Model No.	Name	1	2	3	4	5	6	7	8	(kg)
From 1.9M add to 2.9M	JAS-FS290	2.9 M ADDED	2	1	1	0	4	0	1Set	0	58
From 2.9M add to 3.9M	JAS-FS100T	2.9 M → 3.9M	2	4	0	1	0	4	1Set	2	71
From 1.9M add to 3.9M	JAS-FS390T	3.9 M ADDED	4	5	1	1	0	4	2Set	2	109